



Ka-Band Differential Phase Shift Circulators, Isolators And Duplexers

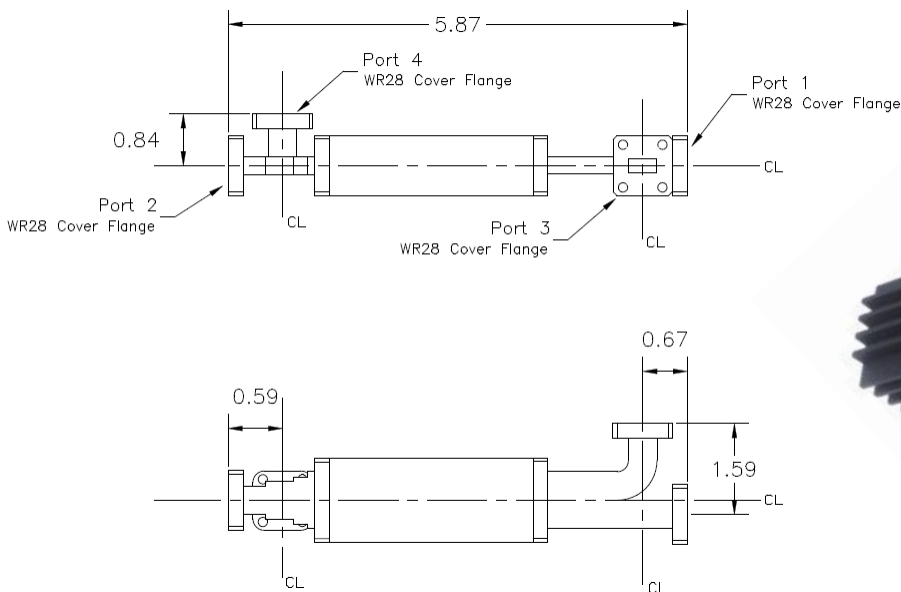

SPECIFICATIONS

Frequency Range: 26.5-40 GHz

Bandwidth: 15- 20 %

Insertion Loss: 0.4 dB

Isolation: 20dB min.

VSWR: 1.20:1 max

Power: 10KW peak Unpressurized

70 KW Peak Pressurized