


S-Band Differential Phase Shift Circulators

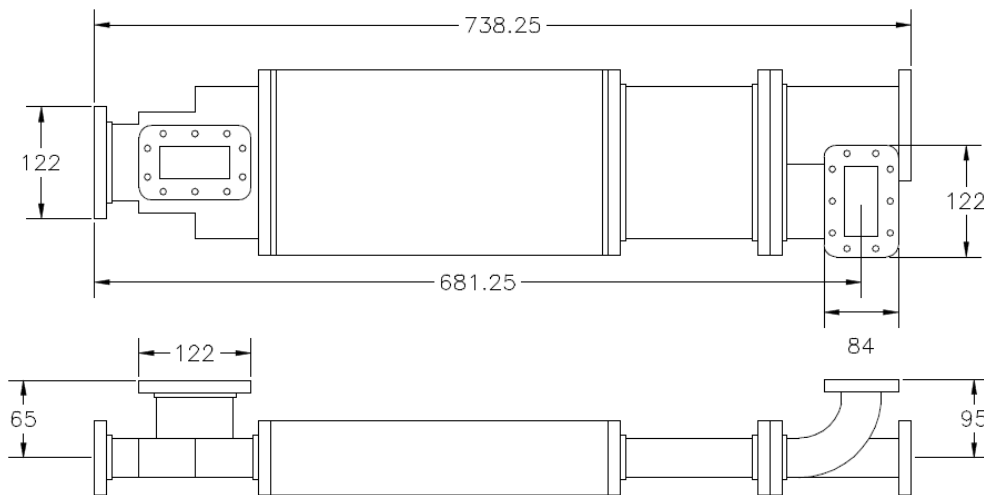

SPECIFICATIONS

Frequency Range: 2.7-3.1 GHz

Insertion Loss: 0.25 dB

Isolation: 23dB min

VSWR: 1.15:1 max

Power: up to 10 MW peak available